



PRODUCT BULLETIN

ND 20 Non-Detergent Motor Oil

API SA/SB

PRODUCT #137

CAM2 ND 20 Motor Oil is a general purpose motor oil that is formulated with select, high quality base oils. It is intended for use in non-critical gasoline engines operating under conditions which do not require a premium high detergent motor oil. **CAM2 ND 20 Motor Oil** is recommended for use in older, worn engines with high oil consumption where an API service classification SA/SB motor oil can be used. **CAM2 ND Motor Oils** are available in 10W, 30W, 40W and 50W SAE viscosity grades.


APPLICATIONS

CAM2 ND Motor Oil may be recommended for light engines that call for a mineral non additive or lightly additized motor oil, compressors, AGMA Non EP Gear Oils, circulating oils and low pressure hydraulic systems.

CAUTION: This oil is rated API SB and is not suitable for use in most gasoline powered automotive engines built after 1951, use in more modern engines may cause unsatisfactory performance or equipment harm.

TECHNICAL DATA

| SAE GRADE | 10 | 20 | 30 | 40 | 50 |
|------------------------|--------|--------|--------|--------|--------|
| Product Code | 327 | 137 | 311 | 319 | 177 |
| Viscosity @ 40°C, cSt | 36.8 | 65 | 90 | 135 | 200 |
| Viscosity @ 100°C, cSt | 6 | 8.6 | 10.6 | 14 | 17 |
| Viscosity Index | 75 min | 75 min | 75 min | 75 min | 75 min |
| API Gravity @ 60°F | 29.5 | 29 | 28.1 | 26.7 | 26.1 |
| Flash Point COC, °F | 410 | 420 | 430 | 440 | 445 |

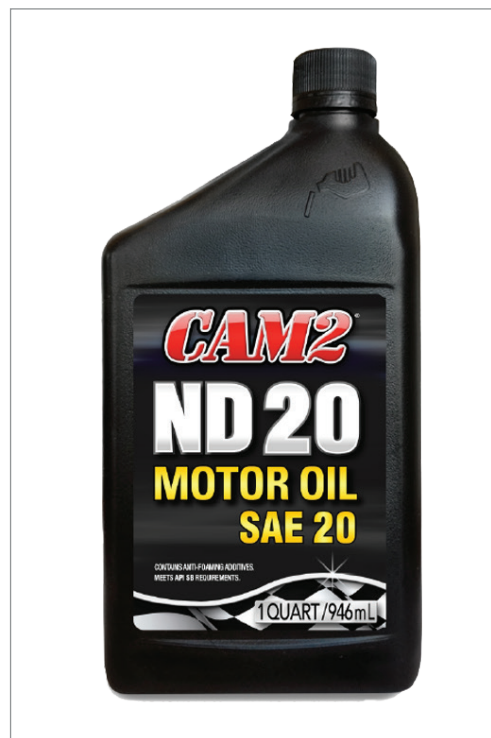

CAM2 INTERNATIONAL, LLC

211 Violet Street Suite 100 • Golden, CO 80401

Telephone 800/338-2262 • Fax: 303/679-8988

www.CAM2.com