



## PRODUCT BULLETIN

# CAM2<sup>®</sup> Synavex Full Synthetic Motor Oil

**API SQ / ILSAC GF-7A & B**

(80565-070/092/093/094/095/096)

**CAM2<sup>®</sup> Synavex<sup>™</sup> Full Synthetic Motor Oils** have been reformulated to meet the demands of modern turbo-charged, and gasoline direct inject (TGD<sub>i</sub>) engines in all operating conditions. Blended with only premium full synthetic base stocks and all-new advanced additive technology, CAM2 Synavex<sup>™</sup> engine oils can extend drain intervals and extend engine life when compared to conventional motor oil.

**CAM2<sup>®</sup> Synavex<sup>™</sup> Full Synthetic Motor Oils** show gains in several keys areas that can provide significant cost savings over the life of the vehicle including over 200% greater protection against valve-train and chain wear while also eliminating the high temperature deposits that drain engines of horsepower over time. Synavex<sup>™</sup> engine oils are formulated to exceed the latest ILSAC GF-7/ Resource Conserving and API SQ performance specifications.

## APPLICATIONS

**CAM2<sup>®</sup> Synavex<sup>™</sup> Full Synthetic Motor Oils** are recommended for use in most light or heavy-duty gasoline driven cars, vans, and light trucks operating in the most severe operating conditions. They meet the latest API SQ /GF-7A and GF-7B performance specifications and are backwards compatible to all previous API and/or ILSAC/Resource Conserving performance categories.

## FEATURES

**LOW SPEED PRE-IGNITION (LSPI)** Protection for small displacement turbo-charged GDI engines.

**EXCELLENT FUEL ECONOMY** Engineered to provide 40-50% improvement in fuel economy over GF-5 rated oils. Helps engine maintain peak fuel efficiency for up to 3x longer than GF-5 Synavex motor oils

**WEAR PROTECTION** Robust anti-wear agents provide improved valve and chain wear protection

**ENGINE CLEANLINESS** Powerful antioxidants resist formation of high temp deposits that drain horsepower and fuel economy while a robust detergent system continues to clean internal components even while engine is sitting idle.

**EXTENDED DRAIN INTERVALS** Lower volatility combined with powerful oxidation protection may extend oil drain intervals in well maintained systems.

## SPECIFICATIONS & APPROVALS

**CAM2<sup>®</sup> Synavex<sup>™</sup> Full Synthetic Motor Oils** exceed all the following performance requirements or OEM specifications:

API SQ and all previous categories  
ILSAC GF-7A, GF-7B (0W-16 only)  
ACEA A5/B5  
GM 4718M (Corvette/Cadillac) / 6094M  
VW 501.00/502.00; VW 508.00 (0W-20 only)  
BMW LL-14E+ (0W-20)  
Fiat 955535-H2, M2. N2  
Honda/Acura HRO-06  
Ford WSS-M2C970-A1, Ford WSS-M2C971-A1,  
Ford WSS-M2C972-A1, Ford WSS-M2C973-A1,  
Ford WSS-M2C960-A1, Ford WSS-M2C961-A1,  
Ford WSS-M2C962-A1, Ford WSS-M2C963-A1,  
Ford M2C946-B1, Ford M2C947-B1


**CAM2 INTERNATIONAL, LLC**

685 Haining Road, Vicksburg, MS 39183 USA • Tel: 833-715-0016

[www.CAM2.com](http://www.CAM2.com)



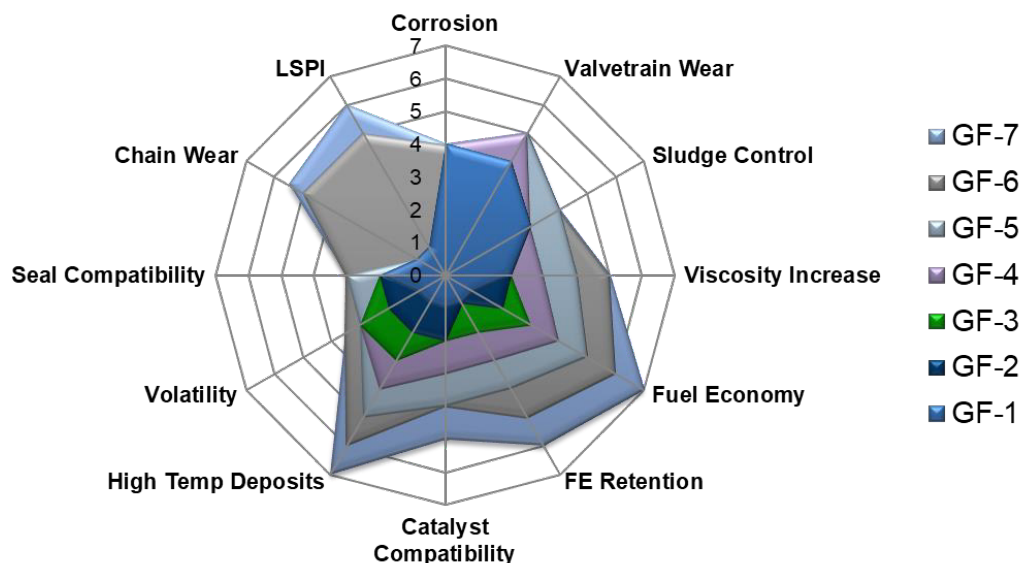

## PRODUCT BULLETIN

### HOW GF-7 COMPARES TO PREVIOUS CATEGORIES



### TYPICAL DATA

#### CAM2<sup>®</sup> SYNAVEX™ API SQ / GF-7A & B

SAE Grade	0W-16	0W-30	0W-40	5W-20	5W-40	10W-30
Product Code (80565-)	092	093	094	070	095	096
Viscosity @ 40°C, cSt	35.04	40-45.82	55.43	49.5	88.31	60.20
Viscosity @ 100°C, cSt	7.032	100-87.86	10.34	14.50	14.89	9.487
Viscosity Index	167	175	178	177	177	140
Pour Point, °C	-50	-48	-48	-45	-44	-44
HTHS @ 150°C	>4.96	>2.70	>3.07	>4.14	>4.14	>2.89
Flash Point, °C (COC)	206	205	205	227	205	203.2
NOACK Volatility	<9.9%	<9.2%	<9.8%	<9.5%	<10.4%	<11.2%
ILSAC Symbol			No Starburst		No Starburst	

The above characteristics are typical of current production. While production will conform to CAM2's specification, slight variations may occur and do not affect performance.

### SPECIAL HANDLING, NOTICES, OR WARNINGS

Avoid contact with skin. Rinse with soap and water immediately after skin contact. This product is unlikely to present significant health hazards. Dispose of used oil properly.

**CAM2 INTERNATIONAL, LLC**

685 Haining Road, Vicksburg, MS 39183 USA • Tel: 833-715-0016

www.CAM2.com